

TONON materials

the company

Passion, experience, experimentation: since 1926 pieces of furniture with an international design for the residential and ho.re.ca. world.

Thanks to the support of leading international designers, our style is eclectic and cosmopolitan. Our philosophy focuses on pursuing the correct balance between matter and form, aesthetics and function, producibility and originality. We combine the value of "doing well" with the constant search for the best solutions, in order to create chairs and furnishings for everyday use which can last over time, making the living of every environment, at home as in hotel, in restaurant as in office, a moment of well-being.



sustainability and environment

"Time and sustainability are incredibly intertwined, for us this means producing objects in the best possible way, so they can last over time. But that is not all. Sustainability is supporting: for us it means being a team of people who work together, supporting those who need it, encouraging to do better and better."

CEO Matteo Tonon



INDEX

FABRICS

Velvy - cat.2	pag. 6-7
I'm sustainable - cat.4	pag. 8-9
Noah - cat.4	pag. 10-11
Nabucco Plus - cat.4	pag. 12-13
Yacht Regatta - cat.4	pag. 14-15
Nordic - cat.4	pag. 16-17
Moss - cat.4	pag. 18-19
In & Out - cat.6	pag. 20-21
Privilege - cat.6	pag. 22-23

LEATHERS

Polo - cat.7	pag. 24-25
Soft - cat.9	pag. 26-27
Savana - cat.9	pag. 28
Gala - cat.10	pag. 29

PU "SOFT TOUCH"	pag. 30-31
-----------------	------------

WOODS	pag. 32
-------	---------

STEELS	pag. 33
--------	---------

ROPES	pag. 34-35
-------	------------

Velvy category 2 - Fabric



260



261



262



263



264



265



266



267



268



269



270



271



272



273



274



275

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

Velvy category 2 - Fabric

	Unità di misura / Measurement Unit	Risultati / Results	Test
Altezza / Width	cm	140 cm	
Composizione / Composition	%	100% pl	
Peso / Weight	g/mtl	560	
Resistenza all'abrasione / Abrasion Resistance	cicli / cycles	>70.000	ISO 12947-2 2016
Pilling		4 - 5	ISO 12945-1 2000
Resistenza della cucitura / Seam Strength	N	Ordito / Warp : 304 N Trama / Weft : 609 N	ISO 13835-2 2014
Resistenza allo sfaldamento della cucitura / Seam Slippage	mm	Ordito / Warp : 2,0 mm Trama / Weft : 2,0 mm	ISO 13936-2 2014
Solidità del colore alla luce / Colour Fastness to light	scala / range 1-8	4	ISO 105-B02 2014
Solidità del colore al lavaggio a secco / Colour Fastness to dry cleaning		4 - 5	ISO 105-D01 2010
Solidità del colore allo sfregamento / Colour Fastness to rubbing		Secco / Dry: 4 - 5 Umido / Wet: 4 - 5	ISO 105-X12 2016

Manutenzione / Cleaning Instructions



Temperatura massima 30° C / Maximum 30° C



Canaggio non ammesso / Do not bleach



Temperatura massima 110° / Iron at low temperature



Non asciugare in asciugatrice / Do not tumble dry



Non asciugare al sole / Do not dry in the sun

Non strizzare / Do not wring out or twist



Lavare a secco / Professional dry-cleaning

Caratteristiche / Features

Antimacchia / Antistain

Idrorepellente / Water repellent

Trattamento Macchie / Stain Treatment

Potete: smacchiabile con acqua/ in caso di macchie ostinate
Intervene con acqua e sapone neutro.

For stain removal with water. To use water and neutral soap
to remove stubborn stain.

Macchie: Canci: smacchiabile con acqua/ in caso di macchie ostinate
Intervene con acqua e sapone neutro.


Macchie: Canci: smacchiabile con acqua/ in caso di macchie ostinate
Intervene con acqua e sapone neutro.

Macchie: Canci: smacchiabile con acqua/ in caso di macchie ostinate
Intervene con acqua e sapone neutro.


Nessuna garanzia per danni causati da interventi non corretti,
detergenti non adatti o uso improprio.
No warranty will be assumed for damage caused by incorrect care,
unsuitable cleaners or improper use.

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

I'm sustainable category 4




4AB




4AD



4A4




4A5



4AC



4A2



4A3



4A9



4A6



4A7



4A1

I'm sustainable category 4

Recycled fabric made from waste materials, manufactured with reduced overall water use and lower gas emission into to the atmosphere

Tessuto riciclato e ricavato da materiali di scarto, prodotto con un ridotto consumo complessivo di acqua e minori emissioni di gas nell'atmosfera.

SCHEDA TECNICA / DATASHEET

	Unità di misura/ Measurement Unit	Risultati/Results	Test
Altezza / Width	cm	140 cm	
Lunghezza rotolo / Roll Length	mt		
Composizione / Composition	%	56%co rigenerato 39%pl 5%pc	
Peso / Weight	gr/mtl	810	
Martindale / Abrasion Resistance	cicli / cycles	30.000	BS 5690
Pilling		3 / 4	BS 5811
Solidità del colore alla luce / Light Fastness	scala / range 1:8	5	UNI 7639/89
Solidità del colore allo sfregamento / Color Fastness to Rubbing	Scala dei Grigi / Grey scale	Secco / Dry: 4	EN ISO 105 X12
		Umido / Wet: 3	
Variazioni dopo lavaggio a secco / Variations after dry cleaning		Ordito / Warp : 2%	UNI 9294
		Trama / Weft : 2%	
Variazioni dopo lavaggio in acqua / Variations after washing in water		Ordito / Warp : 2%	UNI EN 25077
		Trama / Weft : 2%	

Manutenzione / Cleaning Instructions



Temperatura max 30° / 30° fine wash



Candeggio non ammesso / Do not bleach



Temperatura massima 110° / Iron at low temperature



Lavaggio a secco / Professional dry-cleaning

Caratteristiche / Features

Idro-repellente / Water-repellent




Certificazioni / Certifications

BS 5852-1 : 1979

Nessuna garanzia per danni causati da interventi non corretti,
detergenti non adatti o uso improprio.
No warranty will be assumed for damage caused by incorrect ca
unsuitable cleaners or improper use.


GRINTA category 4

TONON

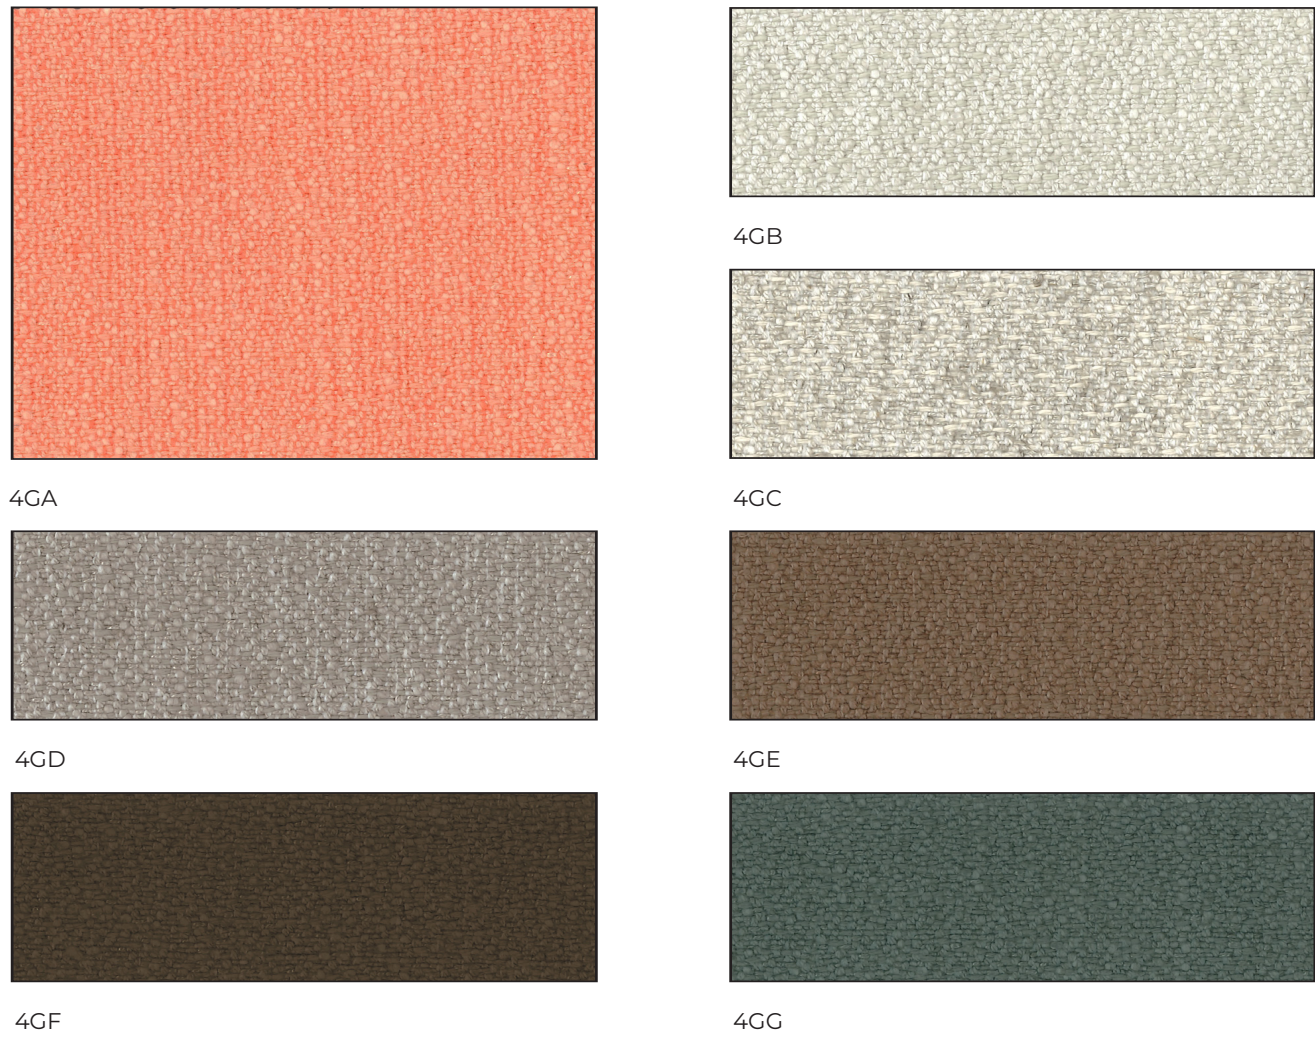

GRINTA category 4

TONON

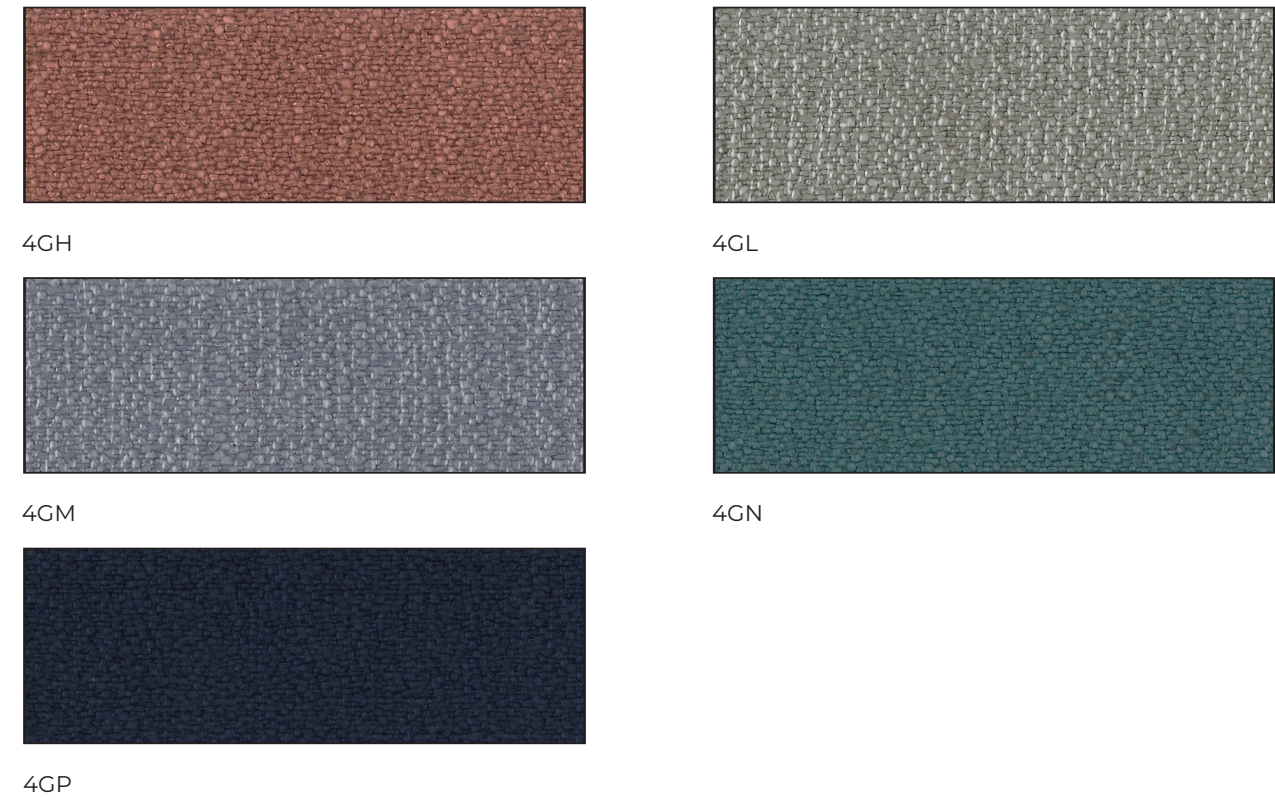

SCHEDA TECNICA / DATASHEET

COMPOSIZIONE composition	50% vi, 21% co, 19% li, 10% pl	
ALTEZZA TESSUTO width	UNI 5113	cm 140
PESO/mq weight	UNI 5114	gr 500 mq
RESISTENZA ALL' ABRASIONE (martindale) abrasion resistance	BS 5960 IWS TM112	35000 rubs
PILLING TEST pilling resistance		4
RESISTENZA DEL COLORE ALLA LUCE ARTIFICIALE light fastness	UNI EN 20105-B02	4/5
SOLIDITA' ALLO SFREGAMENTO A SECCO solidity to dry rubbing	UNI EN ISO 105 X 12	4/5
SOLIDITA' ALLO SFREGAMENTO A UMIDO solidity to wet rubbing	UNI EN ISO 105 X 12	4/5
TEST INFIAMMABILITA' assessment of ignitability	CALIFORNIA TECHNICAL BULLETIN 117:2013;2015	



Noah category 4 - Fabric



Y45



Y26



Y20



Y54



Y05



Y18



Y52

Noah category 4 - Fabric

FABRIC NOAH, MADE OF 100% RECYCLED YARN

"Noah" un nuovo tessuto nella collezione Tonon.
Il nostro pensiero è che sia molto importante rispettare il nostro pianeta.
Il tessuto Noah è stato progettato proprio per questo motivo.
Il tessuto Noah viene prodotto a Barcellona ed è realizzato con filato riciclato al 100%, che deriva dalle fibre ottenute dal recupero delle bottiglie in PET e da tessuti di scarto logorati. Il recupero e il riutilizzo dei rifiuti e il rispetto delle nostre risorse contribuiscono a far crescere il concetto di sostenibilità e a creare una società sempre più consapevole.
Offriamo a voi, nostri clienti, questo materiale nuovo e innovativo sperando di dare un piccolo contributo per salvare il nostro pianeta insieme.
Grazie!

"Noah" a new fabric in the Tonon collection.
We think it's important to respect our planet.
The fabric Noah was designed with this purpose.
The fabric Noah, made in Barcelona, is produced from 100% recycled yarn, which is obtained from recycled fibers from PET bottles and worn fabric scraps.
The recovery and reuse of waste and the respect for our resources contribute to sustainable thinking and a more conscious society.
We offer you as our customers, this new and innovative material, hoping to give a small contribution to save our planet together with you.
Thank you!


"Noah" ein neuer Stoff in der Tonon-Kollektion.
Wir denken, es ist wichtig, unseren Planeten zu respektieren.
Der Stoff Noah wurde zu diesem Zweck entworfen. Der in Barcelona hergestellte Stoff Noah wird aus 100% recycelten Garn hergestellt, das aus recycelten Fasern von PET-Flaschen und abgenutzten Stoffresten gewonnen wird.
Die Verwertung und Wiederverwendung von Abfällen und der Respekt vor unseren Ressourcen tragen zu nachhaltigem Denken und einer bewussteren Gesellschaft bei. Wir bieten Ihnen als unseren Kunden dieses neue und innovative Material an, in der Hoffnung, gemeinsam mit Ihnen einen kleinen Beitrag zur Rettung unseres Planeten zu leisten.
Vielen Dank!

Characteristics	Specifications	Care	Ignitability	Environment
Total composition 100% PES REC 	Seam slippage resistance (mm). 3 EN ISO 13936/2:2004 WARP 2.5 WEFT 2.5 Abrasion resistance (End point) >100.000 EN ISO 12947-2:1998 Pilling resistance 4-5 EN ISO 12945/2:2000 Lightfastness 5-6 EN ISO 105 B02:1998 & 105 B02/A01:2002 Colour fastness to rubbing 4-5 EN ISO 105 X12:2002 DRY 4-5 WET 4-5 Width 140 + 4cm Weight 543 gr/m ² ± 5 % 760 gr/m ± 5 % Custom code UE: 5801.36.00 USA: 5801.36.00.20 Laboratory test number. IN-00625-2020-3	Soiling and cleanability. 4-5 FORD FTM BN 112-08:2005 • Spot-cleaning with soap and water • No chemicals needed for cleaning Machine-washable  Washing conditions.  Dimensional change domestic washing and drying (%) -1.80% -1.40% EN ISO 3759:2008, EN ISO 6330:2000, EN ISO 5077:2008 WARP WEFT	B55852 Source 0 ✓ B55852 Source 1 ✓ EN1021-Part 1 ✓ EN1021-Part 2 ✓ CAL TB 117 ✓ NFPA 260 ✓ BS 7176 Low Hazard ✓ UNI 9175 Class 3IM ✓ UPON REQUEST ✓ UPON REQUEST ✓ UPON REQUEST ✓ UPON REQUEST ✓	Environmental composition.  • Recycled yarn 100% • GRS Recycled PET bottles 81% • GRS Recycled PES waste 19% Sustainability. • Oeko-tex certified • REACH approved chemicals and dyes • Biocide and PFCs free • Zero-waste production • Manufactured under ISO 9001 and ISO 14001 standards • Made in Barcelona (EU) 

Nabucco Plus category 4 - Fabric




4N1

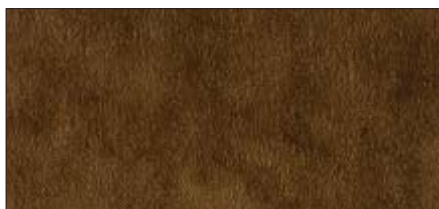

4N3



4N5

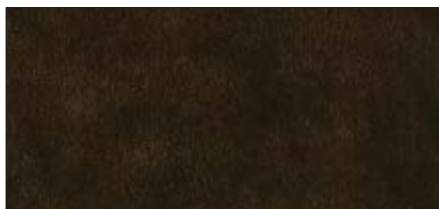

4N7




4N2



4N4



4N6

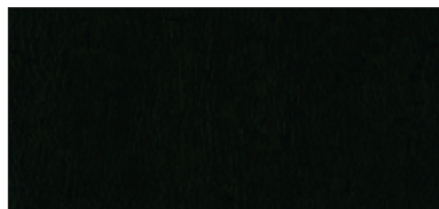

4N8

Nabucco Plus category 4 - Fabric

customs code

59031090.

use

upholstered furniture.

features

83% pvc - 11% polyester - 6% cotton, width
cm $\pm$ 140, weight $\pm$ 760 g/m², thickness $\pm$ 1,30 mm.

roll length

approx. 30 lm., can also be cut-to-length at an extra cost.

abrasion resistance

> 25.000 rubs, ISO 5470-2.

colour fastness to light

4/5, ISO 105 B02.

fastness to rubbing

dry 4/5, wet 4/5, ISO 105 X12.

tensile strength

warp > 350 N, weft > 250 N, ISO 1421.

sustainability

phthalate free.

fire resistance

1IM - UNI 9175; EN 1021 1/2; BS 5852 part 1;
BS 5852 crib 5; only on request, min 300 m;
California TB 117-2013; IMO FTP Code 307 part 8.

attention

slight colour differences between different batches are
allowed, we assume no responsibility for the transfer of
colour/pigment caused by clothing and accessories.



fireproof



imo-med



proposition
65

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

Yacht Regatta category 4 - Fabric



4Y1



4Y3



4Y5



4Y7



4Y2



4Y4



4Y6



4Y8

Yacht Regatta category 4 - Fabric

customs code

59031090.

use

upholstered furniture, medical, outdoor.

features

89% pvc - 11% polyamide, width cm $\pm$ 140,
weight $\pm$ 690 g/m², thickness $\pm$ 1,20 mm.

roll length

approx. 25 lm., can also be cut-to-length at an extra cost.

abrasion resistance

> 250.000 rubs, ISO 5470-2.

colour fastness to light

6, ISO 105 B02.

fastness to rubbing

dry 4/5, wet 4/5, ISO 105 X12.

tensile strength

warp 400 N/5 cm, weft 100 N/5 cm, ISO 1421.

sustainability

phthalate free.

fire resistance

1IM - UNI 9175; EN 1021 1/2; BS 5852 part 1;

NF P 92 507 M2; NFPA 260 Class 1;

California TB 117-2013; IMO FTP Code 307 part 8.

attention

slight colour differences between different batches are allowed, we assume no responsibility for the transfer of colour/pigment caused by clothing and accessories.



I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

Nordic category 4 - Fabric



4NA



4NB



4NE




4NH



4NL




4NM




4NC



4NF



4NJ




4NN



4ND




4NG



4NK



4NP



4NQ

Nordic category 4 - Fabric

Technical Specifications

Composition: 50% PES, 15% PA, 35% ACRIL

Width: 140 cm. UNE 400335

Weight m2: 410 gr/m2

Abrasion resistance: 250.000 cycles UNE EN ISO 12947

Pilling resistance: > 4 UNE EN ISO/DIS 12945-2


Dye resistance to light: 6 Good (ISO 105-B02)



I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

Moss category 4 - Fabric

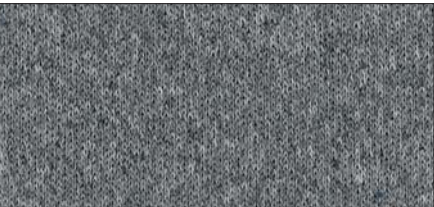

4MA




4MC




4ME



4MG

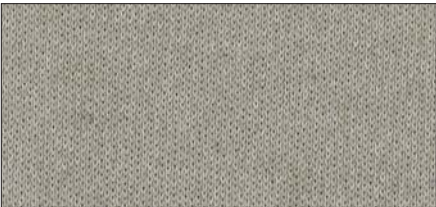

4MB

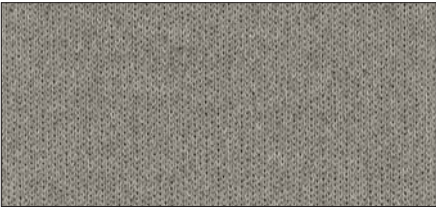

4MD



4MF



4MH

Moss category 4 - Fabric

Composition	100%PES FR	
Width	175 ± 2%	
Linear Weight	854 gr/ml ± 5%	
Seam slippage resistance EN ISO 13936/2	WARP	WEFT
	1,7	2,5
Abrasion Resistance	End Point (A) Fully worn off (B) EN ISO 12947/2	
	50.000 (A)	
	Change aspect 3000c EN ISO 12947/4	
Pilling resistance EN ISO 12945/2	3-4	
	4-5	
Assessment of ignitability	BS5852 Sche. Part 4 Source 0 / 1 BS7176 Low hazard EN 1021 Part 1 / 2 UNI 9175 IM Clase 1.IM CAL TB 117:2013 NFPA 260:2013 DIN 4102 B2 NF D 60 013 IMO FTB 2010 Part 8 A 652 (16) NF P-92:507 M1	
	PASS	
Lightfastness EN ISO 105-B02	6-7	
Colour fastness to rubbing EN ISO 105-X12	DRY	WET
	5	4-5
Dimensional change in domestic washing and drying EN ISO 3759 / EN ISO 6330 / EN ISO 5077	WARP	WEFT
	-3%	1,5%
Acoustic test sound absorption	EN ISO 354:2004 EN ISO 11654:1998 ASTM C423	
Cleaning		

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

In & Out category 6 - Fabric




M42



M43



M55



M44




M41



M53



M49



M45



M51



M52



M48

In & Out category 6 - Fabric

SCHEDA TECNICA / DATASHEET

Composizione / Composition95% PP - 5% PL	
Altezza del tessuto / Width140 cm	
Peso del tessuto al metro lineare / Weight750 gr/ml.	
La tonalità di colore può leggermente variare da una partita all'altra. Colortone may vary slightly	
PROVA	RISULTATO / RESULTS
RESISTENZA ALL'ABRASIONE / ABRASION RESISTANCE - Metodo Martindale EN ISO 12947-2	30.000 giri / cycles
SOLIDITA' DEL COLORE ALLA LUCE / COLOR FASTNESS TO LIGHT - Metodo UNI ISO 105-B02	7/8
SOLIDITA' DEL COLORE ALLO SFREGAMENTO / COLORFASTNESS TO RUBBING -Metodo ISO 105 X 12	Secco / Dry: 4/5 Umido / Wet: 4/5
RESISTENZA ALLA FORMAZIONE DI PILLING / PILING RESISTANCE - Metodo UNI EN ISO 12945-2	4
    	

Privilege category 6 - Fabric



6P8



6P2




6P3



6P4



6P1

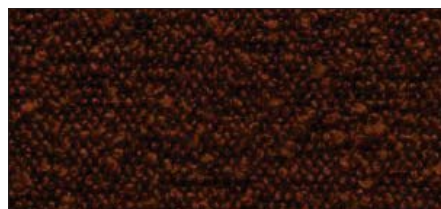

6P5



6P6



6P9

Privilege category 6 - Fabric



6P7

TECHNICAL INFORMATION


Composizione / Composition: 95% PL 5% PC

Peso / Weight: 855 gr/ml

Altezza / Height: 145 cm

Martindale: >80.000

Pilling: 4



I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV


Polo category 7 - Leather



P10



P47



P72



P30



P32



P31



P36



P39



P42




P44



P23



P24



P54



P58




P25



P84



P55



P60

Polo category 7 - Leather

Thickness	0,9/1,1 mm		Fire resistance
Origin	Raw Hides		British Standard BS 5852 Part I (1979)
Place of origin	European		N° 0: Cigarette Test
Tanning	Chrome salts		N°1: Match Test
Dyeing	Online throught - dyeing		
Finishing	Pigments finishing		
Typology	Corrected grain		
Light fastness xenon lamp	UNI EN ISO 105 B02	Value > 8 Blu. scale	Imo FTP part 8-Resolution A652 (16)
Tear strenghe	UNI EN ISO 3377 - 1	42 N/mm	NI/0: Cigarette test NI/1: Match Test
Dry rub fastness	ISO 11640	500 cycles value 4/5 grey scale	
Wet rub fastness	ISO 11640	250 cycles value 4/5 grey scale	
Flex crack resistance	ISO 5402	> 50.000 cycles	
Adhesion of finish	UNI EN ISO 11644 2008 - Dedalo Srl (Arzignano - VI)	9 N/cm	TB 117-A11 @2013:2013 Cigarette Test (California)
			passes

Soft category 9 - Leather



Soft category 9 - Leather

Thickness	1,1/1,2 mm	
Origin	Raw Hides	
Place of origin	European	
Tanning	Chrome salts	
Dyeing	Aniline through - dyeing	
Finishing	Water - based pigments	
Typology	Grain slightly corrected	
Light fastness xenon lamp	UNI EN ISO 105 B02	Value > 4 Blu scale
Tear strenghe	UNI EN ISO 3377 - 1	> 28 N/mm
Dry rub fastness	ISO 11640	500 cycles value 4 grey scale
Wet rub fastness	ISO 11640	80 cycles value 5 grey scale
Flex crack resistance	ISO 5402	25000 cycles
Adhesion of finish	UNI EN ISO 11644 2008 - Dedalo Srl (Arzignano - VI)	> 7,5 N/cm
Fire resistance	British Standard BS 5852 Part 1 (1979) N° 0: Cigarette Test N°1: Match Test	pass


Savana category 9 - Leather



968



963

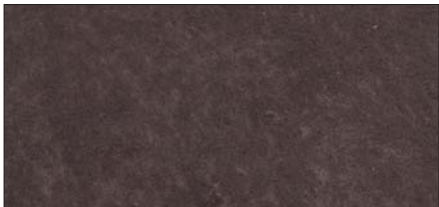


967



961



964

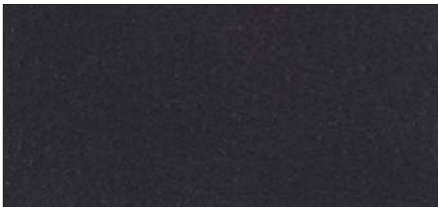

974

Thickness	1,3/1,5 mm
Origin	Raw Hides
Place of origin	European
Tanning	Chrome salts
Dyeing	Aniline through - dyeing
Typology	nubuck brushed by hand
Light fastness xenon lamp	UNI EN ISO 105 B02 Value > 3 Blu. scale > 45 N
Tear strenghe	ISO 11640 500 cycles value 4 grey scale
Dry rub fastness	ISO 11640 250 cycles value 3/4 grey scale
Wet rub fastness	ISO 5402 > 50.000 cycles
Flex crack resistance	UNI EN ISO 11644 10,5 N/cm
Adhesion of finish	2008 - Dedalo Srl (Arzignano - VI)
Fire resistance	British Standard BS 5852 Part I (1979) N° 0: Cigarette Test N°1: Match Test passes

Gala category 10 - Leather



J10



J12



J14



J11



J13

Tutti i modelli imbottiti possono essere rivestiti con la pelle cat. 10 applicando un supplemento del 10% sul prezzo della categoria 9.

All models of our collection can also be supplied with leather category 10, applying a surcharge of 10% on the price of category 9

Alle gepolsterten Modelle können auch mit dem Leder der Kategorie 10 bezogen werden, Aufpreis: 10% auf den Preis der Kategorie 9

Tous les modèles rembourrés peuvent également être recouverts en cuir catégorie 10 avec un supplément de 10 % sur le prix de la catégorie 9

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

I COLORI SONO PURAMENTE INDICATIVI - COLORS ARE PURELY INDICATIVE -
LES COULEURS SONT PUREMENT INDICATIVES - DIE FARBABBILDUNGEN DER MATERIALIEN SIND REIN INDIKATIV

Polyuretane “Soft Touch”



X04 - ORANGE



X09 - SAND




X07 - BLACK




X15 - BROWN



X05 - RED



X10 - YELLOW



X16 - MUD




X03 - DARK GREY



X02 - LIGHT GREY




X01 - WHITE




X08 - BLUE




X19 - PIGEON BLUE



X21 - OLIVE GREEN



X22 - DUSTY PINK



X23 - PETROL

SOFT TOUCH CERTIFICATIONS

The material used by Tonon for this collection satisfy the following regulations:

- Surfaces strength to cold liquids EN 12720/97
- Surfaces strength to cold liquids synthetic urine - quick-acting disinfection EN 12720/2013
- Colour strength to rubbing EN ISO 11640:1998
- Flame resistance 1JM - BS CRIB 5 Cigarette test - CAL 117
- Surfaces strength to cleaning products PTP 53/95
- Ace bleach test, ammonia test (sol.10%), Baysan multipurpose, Lyso-Form for kitchen, Viakal, Vetril, Vim liquid, Cif multipurpose, Cif with bleach, Saniform 360
- Accelerated ageing through lamp UV ASTM G 154 -06

SOFT TOUCH COLLECTION BLEACH-CLEANABLE*

DISINFECTION OF THE “SOFT TOUCH COLLECTION” SUCCESSFULLY TESTED WITH A SOLUTION OF WATER AND 0.1% SODIUM HYPOCHLORITE.

With the measures prescribed in relation to the Corona virus, we are all facing new challenges. Hygiene measures have taken on a new importance. We all need to know who can protect us from viruses and bacteria. In the hotel and restaurant industry, this also includes sanitizing furniture. The new protocols for the restaurant and hotel industry prescribe sanitation after each guest and, if possible, to follow the recommendations of the World Health Organization. What is prescribed in the hospitality industry can also easily be carried out in everyday private life.

THE PROTOCOLS PRESCRIBE:

All surfaces must be cleaned with a solution of water and 0.1% sodium hypochlorite (the solution is formulated by adding 50 ml of 5% household bleach in 2.5 liters of water). The mixture formulated fights bacteria and germs, guarantees maximum cleaning and ensures that clean surfaces are sanitized.

WE TOOK UP THIS CHALLENGE AND TESTED OUR SOFT TOUCH COLLECTION WITH THIS FORMULA.

After 1000 cycles no changes were detected on the surface of the material and in the color. We are proud to inform you that the polyurethane used for “moon” facilitates quick and effective cleaning according to the most stringent sanitization protocols.

Wood Matt Finishing

BEECH



1.101 - NATURAL BEECH



1.111 - BEECH BLACK



1.134 - BEECH BROWN




1.141 - BEECH
NATURAL CHERRY



1.144 - BEECH WENGE



1.146 - BEECH
AMERICAN WALNUT



1.333 - WHITE MATT
LACQUERED



1.337 - BLACK MATT
LACQUERED


OAK



3.011 - OAK OILED



3.102 - NATURAL OAK



3.144 - OAK WENGE



3.146 - OAK
AMERICAN WALNUT



3.149 - OAK DARK GREY

AMERICAN WALNUT



8.011 - AMERICAN WALNUT
OILED



8.146 - NATURAL
AMERICAN WALNUT

Steel Finishing Lacquered




40 - CHROME



47 - MATT SATIN



76 - BURNISHED BROWN



61 - WHITE



59 - DARK GREY



64 - BLACK



72 - GREY



74 - MUD



78 - BRONZE

TONON

Ropes



300 - BLACK




303 - BRONZE



305 - BLUE



313 - RED



321 - BLUE JEANS



323 - GREEN BAMBOO



330 - MELANGE BROWN



302 - LIGHT GREY



304 - BORDEAUX



306 - OLIVE GREEN



316 - YELLOW



322 - LINEN



324 - COCOA

TONON materials